

04-6

乐橙4号-6四针六线拼缝机
4-NEEDLE 6-THREAD STITCHING SEWING MACHINE

技术创新引领者 TECHNICAL INNOVATION LEADER


采用特殊装置，使送布能力更加突出
厚料、薄料都能达到完美缝绗

Special devices are adopted to make the materials feeding capacity more prominent.
To make thick and thin materials achieve perfect sewing.




- 超大操作空间设计
Super large operating space design
- 直接式驱动装置
Direct drive device
- 可选择电动或气动来提升压脚
Electric or pneumatic can be choosed to lift the presser foot
- 安全保护机构，针棒升到最高点，压脚才能抬起
Safety protection mechanism, the presser foot can be lifted only when the needle bar rised up to the highest point
- 省电、低噪音无必要功率损耗
Power saving, low noise and unnecessary power consumption
- 提高工作效率，缝制效果更好
Raising working efficiency, sewing effect much better

自动吸料装置
Automatic suction device

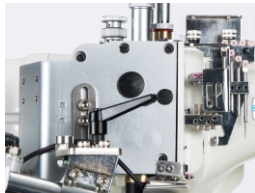

抬压脚自动剪线
Automatic thread trimming of presser foot lifting

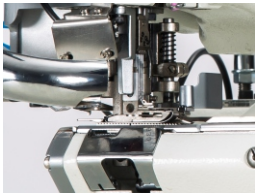

| O4-6-152 | UY128GAS | 6 | 5.2 | 0.8-2 | 8 | 4000 |
|-----------|----------|---|-----|-------|---|------|
| O4-6-160 | UY128GAS | 6 | 6 | 0.8-2 | 8 | 4000 |
| O4-6-252 | UY128GAS | 6 | 5.2 | 0.8-2 | 8 | 4000 |
| O4-6-260 | UY128GAS | 6 | 6 | 0.8-2 | 8 | 4000 |
| O4-6-252H | UY128GAS | 6 | 5.2 | 0.8-2 | 8 | 4000 |
| O4-6-260H | UY128GAS | 6 | 6 | 0.8-2 | 8 | 4000 |

* 型号说明：1为单切；2为双切；52/60为针位
Model Description: 1 means single cut; 2 means double cut; 52/60 means needle gauge

050

乐橙5号高速绷缝机
HIGH SPEED INTERLOCK SEWING MACHINE


高品质多样化缝制 HIGH QUALITY AND DIVERSIFIED SEWING

本机为平台式机体，机电一体化系统设计，能完成自动切线，自动提升压脚，自动停针位等一系列动作，可用于两面装饰缝，适用于各种各样的装饰，能满足高品质及多样化的缝制效果。

This machine is a platform type machine body designed with an electromechanical integration system. It can complete a series of actions, such as automatic cutting, automatic presser foot lifting, automatic needle stop position, etc. it can be used for decorative sewing on both sides. It is suitable for all kinds of decoration and can meet high-quality and diversified sewing effects.



- 直接驱动装置，节能低噪
Direct drive device, Energy saving and lower noise
- 可选择电动或者气动剪线、抬压脚功能
Electric trimming or pneumatic trimming and presser foot lifting functions can be selected
- 外置打线凸轮设计，使用便捷
External threading cam design, easy to operate
- 可配置滚领、下摆折边、裤耳等专用功能模块，适应不同使用场景
It can be configured with special function modules such as roll collar, down hem, pants ears, etc., to adapt to different usage scenarios

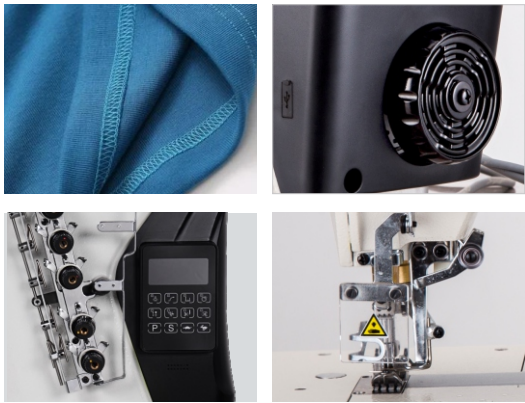

| O50 | UY128GAS11 | 3 | 5 | 5.6 | 1.2-4.5 | 1/0.6-1/1.3 | 5/7 | 5500 |
|----------|------------|---|---|-----|---------|-------------|-----|------|
| O50-2 | UY128GAS11 | 3 | 5 | 5.6 | 1.2-4.5 | 1/0.6-1/1.3 | 5/7 | 5500 |
| O50-2-D3 | UY128GAS11 | 3 | 5 | 5.6 | 1.2-4.5 | 1/0.6-1/1.3 | 5/7 | 5500 |
| O50-D3 | UY128GAS11 | 3 | 5 | 5.6 | 1.2-4.5 | 1/0.6-1/1.3 | 5/7 | 5500 |

* 型号说明：O50为基本型；2为滚领功能；D3为自动剪线、松线、抬压脚
Model remarks: 3 refers to 3-thread; 4 refers to 4-thread; 5 refers to 5-thread; H refers to heavy material; 5-1 refers to wide needle gauge; 3-02 refers to narrow width; D2 refers to 2 automations