




DOLLOR SEWING MACHINE


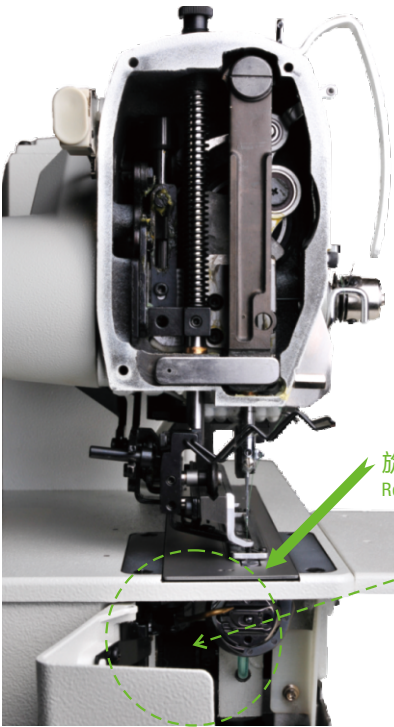


旋梭 (微量供油)
Rotary hook (tiny oil)

清除油污

通过先进的干机头化技术，除旋梭外
无需加油，消除了缝制品被机油污染。

Adopt advance dry head technology, no need oil except
rotary hook, avoid dirty cloth

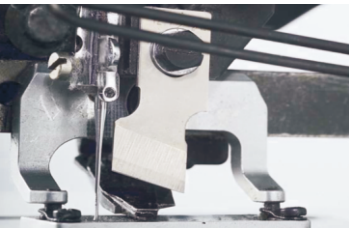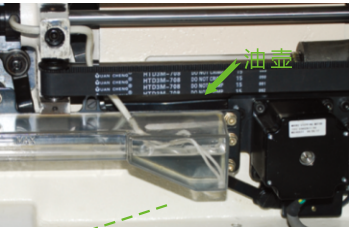

新型电机切刀装置，多次切刀时布料裁剪更稳更准

New designed motor cutter structure, more stable and accurate during repeated cut

高智能的自动多次切刀功能，在应对不同压脚类型下的不同大小扣眼时，精准的根据使用刀口大小计算出合理的切刀次数，达到完美的切刀工作。G3采用了电机驱动切刀，在多次切刀时噪音及震动更小，缝制较薄及较厚料时不易出现卡布现象，切刀动作更稳定。

Intelligent auto multi cut function, accurate figure out reasonable cut times according to the hole size when in different hole under different foot.G3 adopts motor drive cutter makes much lower noise and vibration when multi cut, easily cut even much light or more heavy cloth material, more stable of the action of cut.

效果好的下缝机能

Perfect under sewing function

下缝对针织等伸缩性的面料具有很好的效果，有下缝和合缝的花样，亦可组合；

下缝：由于上线被确实的卷入，因此不会产生松线，可缝9圈；

合缝：抑制了纽扣孔的扩大，完美地完成缝制；

设定底缝和双重缝功能，一样多用，可同时适用梭织服饰和弹性不大的针织、羊毛衫等服装。

The under sewing is much better effect for flexible material, with under sewing and joint sewing pattern, and also combined.

Under sewing: as the up thread roll in, so not happen thread release, can sew 9 circles

Joint sewing: restrain the hole expand, perfect finish the seam.

Set the under sewing and double sewing function, can suitable for woven fabric and also little elasticity knitting or sweater etc.



下缝



无下缝



合缝



有下缝

G3A	DPX5(11#)11#-14#	4,200针/分(rpm)	(Max)最大17mm	衬衫、女装、工作服等棉布纽扣 Shirts, Lady clothing, Overalls and other cotton materials	(Max)最大40mm (Standard)标准5mm

切刀尺寸 Knife size	6.4-31.8mm (1/4" ~ 1 1/4")	缝制范围 Sewing range	6 × 120mm	针杆行程 Needle bar stroke	34,6mm
可记忆数据 Storage	最多99个花样 Max. 99 patterns	自动抬压脚 Auto-presser foot lifter	针摆、送布驱动方式 Needle, feeding drive mode	步进马达驱动 Driven by stepping motor	电源/消耗电力 Power consumption
					单相AC220V~240V/600VA Single phase 220V-240V/600VA

型号说明：A为一体机

Model Description: A means all-in-one machine